
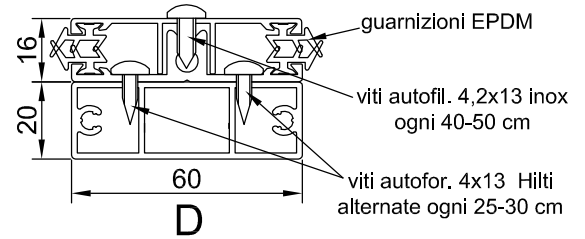


TUTTI I PROFILI SONO REALIZZATI IN ALLUMINIO VERNICIATO A POLVERI POLIESTERE LEGA 6060 STATO T5 o T6 CON UNO SPESSORE VARIABILE TRA 1,5 - 2 mm. (scala 1:2)

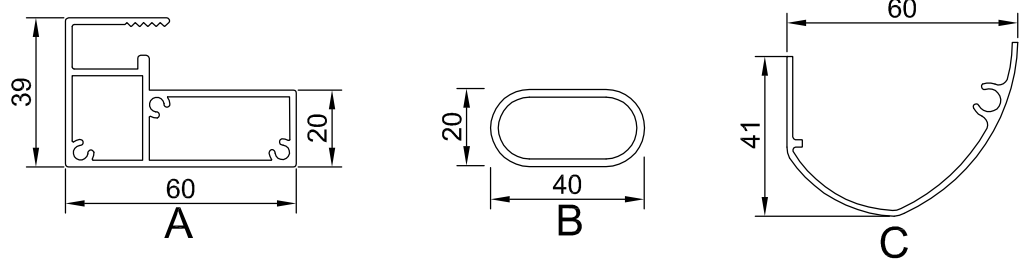

| CODICE | S cm | L max cm | Area mq | H cm | h cm |
|--------|------|----------|---------|------|------|
| SC060 | 60 | 280 | 1,68 | 43 | 38 |
| SC070 | 70 | 270 | 1,89 | 49 | 43 |
| SC080 | 80 | 260 | 2,08 | 56 | 63 |
| SC090 | 90 | 250 | 2,25 | 63 | 54 |
| SC100 | 100 | 240 | 2,4 | 70 | 59 |
| SC110 | 110 | 218 | 2,39 | 77 | 63 |
| SC120 | 120 | 200 | 2,4 | 83 | 68 |
| SC130 | 130 | 184 | 2,39 | 90 | 73 |
| SC140 | 140 | 170 | 2,38 | 97 | 76 |
| SC150 | 150 | 160 | 2,4 | 104 | 83 |

CODICE **SCxxx** DATA 24/04/12
 PROFILI ALLUMINIO ESTRUSO ALLUMINIO 6060 STATO T5 o T6
 LASTRE DI COPERTURA POLICARBONATO COMPATTO SPESS. 4 mm.

DESCRIZIONE **PENSILINA SCUDO** GUARNIZIONI EPDM
 DISEGNATO APPROVATO

| REV. | DESCRIZIONE REVISIONE | DATA |
|------|-----------------------------|----------|
| 06 | ---- | ---- |
| 05 | ---- | ---- |
| 04 | ---- | ---- |
| 03 | ---- | ---- |
| 02 | ---- | ---- |
| 01 | ---- | ---- |
| 00 | PRIMA EMISSIONE DEL DISEGNO | 24/04/12 |

